




Lanyard for
Full Body Harness
&
Body Belt

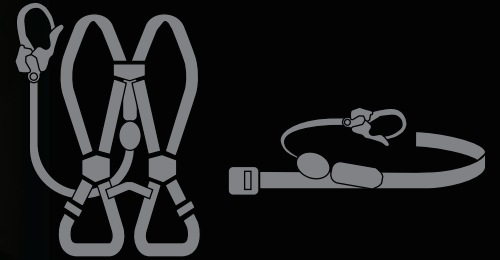

Smallest Retractor

Smallest retractable lanyard ever;
smallest handy retractor;
enables the users move smoothly.

Japanese Personal Fall Arrest Systems Standard




Made in **Japan**

REELOCK mini 

Fastest lock function

Light weight

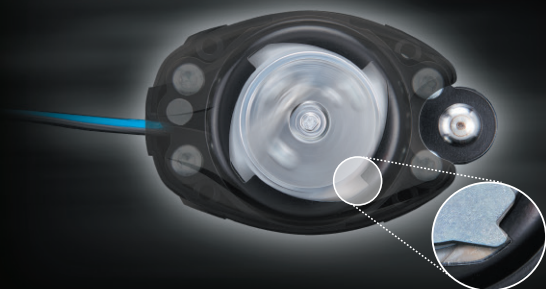

The lock function activates in 0.24 seconds after the fall from height. Fastest lock function shortens the fall distance that significantly reduces the impact on the user.



Single lanyard weight
approx. 700g



Double lanyard weight
approx. 1280g

130kg maximum working capacity
The light weight reduces the burden on the body of the users.

REELOCK mini  **Single Lanyard Model: HL-HS-130**



Compact form



For body belt



Lanyard length	Webbing	Weight
approx.1550mm [Retracted length approx.660mm]	Width: 18.5mm Thickness: 1.35mm	approx. 700g

REELOCK mini  **Double Lanyard Model: HL-HW-130**



Compact form



Can be pulled out smoothly



Lanyard length	Webbing	Weight
approx.1550mm [Retracted length approx.660mm]	Width: 18.5mm Thickness: 1.35mm	approx. 1280g

Japanese Personal Fall Arrest Systems Standard

Product tested "TITAN" Brand Lanyard Type HL-HS-130
[Lanyard : 18.5mmW X 1.35mmT X 1550mmL UHMWPE Webbing Lanyard
No.56A hook / Carabiner / Shock Absorber]

Test facility -Breaking Strength Tester : cap. 100kN
-Fall-arrest Testing Tower : Height 10meter
-Dynamic Strain Measuring Instrument for Fall-arrest : cap. 50kN

Test results

Test Item	"Standard" Requirement	Test Result
Webbing Lanyard	Over 15.0kN	25.8kN
No.56A Hook	Over 11.5kN	23.0kN
Carabiner	Over 11.5kN	25.4kN
Retractor	Over 11.5kN	15.8kN
Shock Absorber	Over 15.0kN	23.8kN
Impact Load	Average 4.0kN or less	3.48kN
Shock Absorber Displacement	Under 1200mm	455mm

SANKO INDUSTRIES CO.,LTD.

<http://www.sanko-titan.co.jp/en>

Head Office

1-14-7 Niitaka Yodogawa-ku Osaka 532-0033

tel: +81-6-6394-3541 fax: +81-6-6395-0041

